



NEWTEX®

Ficha Técnica ENG

Fire Equipment de México
Poniente 122 No. 513,
Col. Coltongo, Del. Azcapotzalco,
C.P. 02630, CDMX, México
Tel. (+52) 55 5368 8888
consulta@FireEquipmentMexico.com

FEM S.A.
Fire Equipment de México

to protect those who keep us safe

X60

ADVANCED FIRE ENTRY SUIT

The X60 Advanced Fire Entry Suit is a heavily insulated aluminized suit designed for fire entry and engulfment.

The suit features a Z-Flex® aluminized outer shell which reflects 95% of radiant heat and withstands radiant temperatures up to 3000°F (1650°C). In addition to providing outstanding protection, Z-Flex is also the most durable aluminized material available and will not de-laminate under even the most demanding conditions. A foil layer beneath the outer shell, and O-PAN heat barrier, and two layers of fiberglass insulation work together to provide maximum protection for extended exposure to extreme temperatures.

This suit can be used in foundries, petrochemical plants, processing facilities, and other environments in which workers are at risk for engulfment.



Ensemble Features

Jacket

- Raglan sleeves
- Double storm fly closure
- Pouch for SCBA
- Inner cinch for tight seal

Pants

- Easy entry design
- ZetexPlus knee patches

Boots

- Easy-On Design
- For Wear Over Work Boots

Hood

- Hard cap with ratchet adjustment*
- Full shoulder length drape
- Dual-layer gold coated glass lenses
- Rounded bib

Mittens

- Mittens with an Aluminized Back
- ZetexPlus Palm & Fleece Lining

Also Included

- Ballistic nylon duffle bag
- Nomex® balaclava

Suit Construction

Radiant Shell
Z-Flex® A-601 Aluminized Texturized Fiberglass

Insulation Layers
Pyron® Insulation, Z-Flex® AF F-628 Foil & Fiberglass Insulation

Thermal Liner
FR Cotton

Suit Weight

Jacket & Pants Only*: 38 lbs (17.2 kg)

Total Ensemble*: 55 lbs (24.9 kg)

* Weights are approximate. Actual weights may vary.

Suit Sizing

One Size Fits Most


User's Chest	User's Waist	Jacket Length	Sleeve Length	Pant Inseam
Up to 50" / 127 cm	Up to 44" / 112 cm	33" / 84 cm	35" / 89 cm	30" / 76 cm

*Hard cap meets ANSI-Z89.1-2009 impact resistance tests.
**2XL and custom sizes are available upon request for an additional charge.

The X Series suits incorporate the latest apparel design features to provide outstanding flexibility, dexterity, and comfort while maximizing safety and efficiency. With more than a dozen options, we are certain that you will find an X Series suit that meets your requirements.

When selecting a proximity or fire entry suit, it is important to consider the convective, conductive, and radiant heat risks in your work area and the length of exposure to that heat. The advanced aluminized outer shell of the X Series suits provides the ultimate protection from radiant energy, the heat transmitted from all hot objects. The X Series also provides protection from conductive and convective heat. The level of conductive and convective protection increases with each suit as you move from the most lightest suit to the heaviest.

Thermal Protective Performance [TPP]

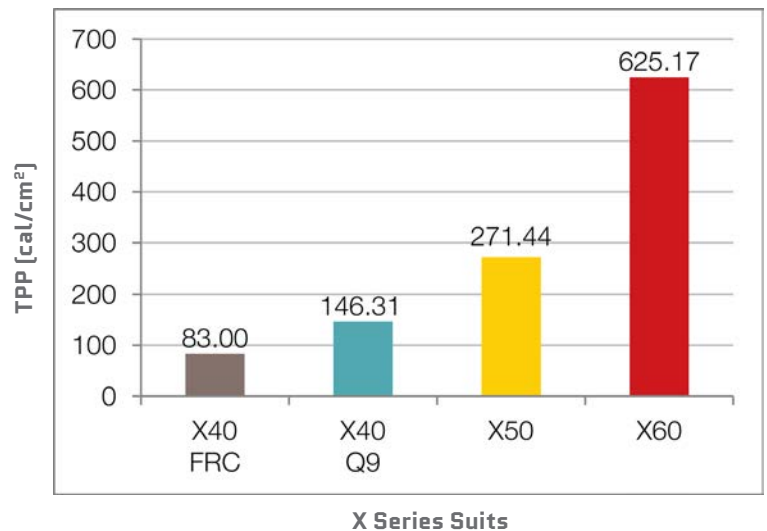

The Thermal Protective Performance (TPP) graph above illustrates the relative protective values of the X40, X50, and X60 suits in relation to each other. The TPP test exposes samples to convective and radiant heat sources and measures the heat transferred through the test specimen to calculate a tolerance time to 2nd degree burn. The levels of exposure are extreme and not representative of most real world scenarios. Real world industrial maintenance and emergency response environments are likely to be unpredictable and vary from test conditions. We recommend only professionally trained industrial workers and first responders use these suits under established safety protocols.

Testing & Certification

The X60 Advanced Fire Entry Suit meets the requirements of the **ISO 11612** test standard. The Z-Flex® outer shell also meets or exceeds the additional specifications listed in the table below.

Test Description	Standards
Radiant Heat	ISO 6942, EN 366, ASTM F1939
Convective Heat	ISO 9151, EN 367
Limited Flame Spread	ISO 15025, EN 532
Molten Metal	ISO 9185, EN 348, ASTM F955
Tear Resistance	ISO 13937, EN 388

**Test results are available upon request. Please email tech@newtex.com.*



Headquarters
8050 Victor-Mendon Road
Victor, NY 14564 USA

800-836-1001 Tel
585-924-4645 Fax

Asia/Pacific Office
31 Rochester Drive, Level 24
Singapore 138637

65-6748-1138 Tel
65-6748-0848 Fax

For nearly 40 years, Newtex has been a pioneer and leading global producer of high temperature materials and engineered solutions for thermal management and fire protection. Headquartered in Rochester, New York, Newtex is an ISO 9001:2015 certified, vertically integrated manufacturer of an impressive portfolio of textiles and fabricated systems for insulation and fire containment. Globally recognized textile brands include ZetexPlus®, Z-Flex®, and Z-Block™. Newtex is a minority owned, veteran-managed business that has served the US Military and leading global industries since 1978. Newtex products are proudly made in the USA.

Zetex®, ZetexPlus®, and Z-Flex® are registered trademarks of Newtex Industries, Inc.

